



STERNS POOLS


ASSEMBLY GUIDE FOR CARIBBEAN SPLASHER POOLS

CHECKLIST OF PARTS SUPPLIED

Model No.	All Sizes Approximate	Approx. Weight	Bolts Nuts & Washers	PVC Rails	PVC Joiners	Liner	Approx. Gallons	Approx. Litres
406-806 10501-10806	2.4m x .6m 8' x 24"	15 kg	26	13	26	1	490	2100
407-807 10502-10807	3.0m x .6m 10' x 24"	20 kg	26	16	32	1	777	3300
408-808 10504-10808	3.6m x .9m 12' x 36"	40 kg	42	13	26	1	1800	8200
411-811 10506-10811	4.5m x .9m 14'9" x 36"	55 kg	42	16	32	1	2750	12800

1. SELECT SUITABLE SITE

The pool must be placed on **ABSOLUTELY LEVEL GROUND** to ensure that excessive pressure is not placed on one side of the pool when filled. If a site has to be levelled, dig the entire area out. **NEVER BUILD UP THE LOW SIDE** as water pressure will compress the filled area causing the pool to collapse. Should extensive excavation of a sloped area or back filling be required, a brick retaining wall may be necessary. It is not advisable to backfill up to the pool wall but where a small amount of fill is unavoidable it is essential that all buried metal parts be coated with fish oil to prevent rust. River sand should be used adjacent to the pool wall to distribute pressure evenly and provide drainage. Backfilling against the pool wall should never be deeper than 150mm.

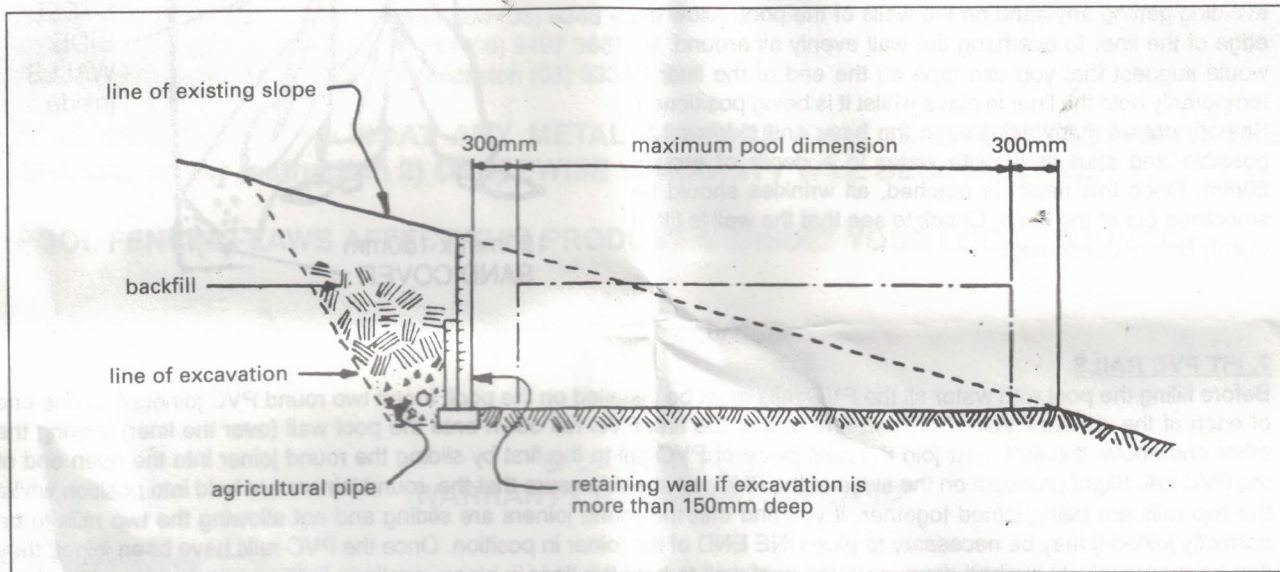

Remove any rough or sharp articles that would be likely to damage the liner from the pool area. **Kill off and remove all grass and weeds from under the pool area** - some grass can grow from under the pool and puncture the liner. It is a good idea to lay a sheet of black polythene under the pool to help prevent weed growth. Never assemble the pool directly onto gravel, concrete, asphalt, nut grass or weed stubble.